



# วิธีลงทะเบียน Hik-online เพื่อเข้าดูกล้องวงจรปิดออนไลน์ เวอร์ชัน ปี 2015

เนื่องด้วยตอนนี้ทาง Hikvision ได้มีการเปลี่ยนแปลงแก้ไขระบบ Hik-online เป็นลงทะเบียนแบบใหม่จึงทำให้ ลูกค้าและตัวแทนจำหน่ายที่มีการลงทะเบียนแบบ IP Server ไม่สามารถลงทะเบียนใช้งานบน Hik-online ได้ให้ทำการแก้ไขเป็น แบบ HiDDNS , hkDDNS , EasyDDNS เท่านั้นจะสามารถดูออนไลน์ผ่านมือถือได้ปกติ !!!

## วิธีการแก้ไข

แบบที่ 1 ทำหน้าเครื่อง DVR

DVR local menu > Configuration > DDNS > Enable the DDNS > Select **HiDDNS ,hkDDNS ,EasyDDNS** > แล้วใส่ชื่อ Domain name ที่ต้องการ > Apply

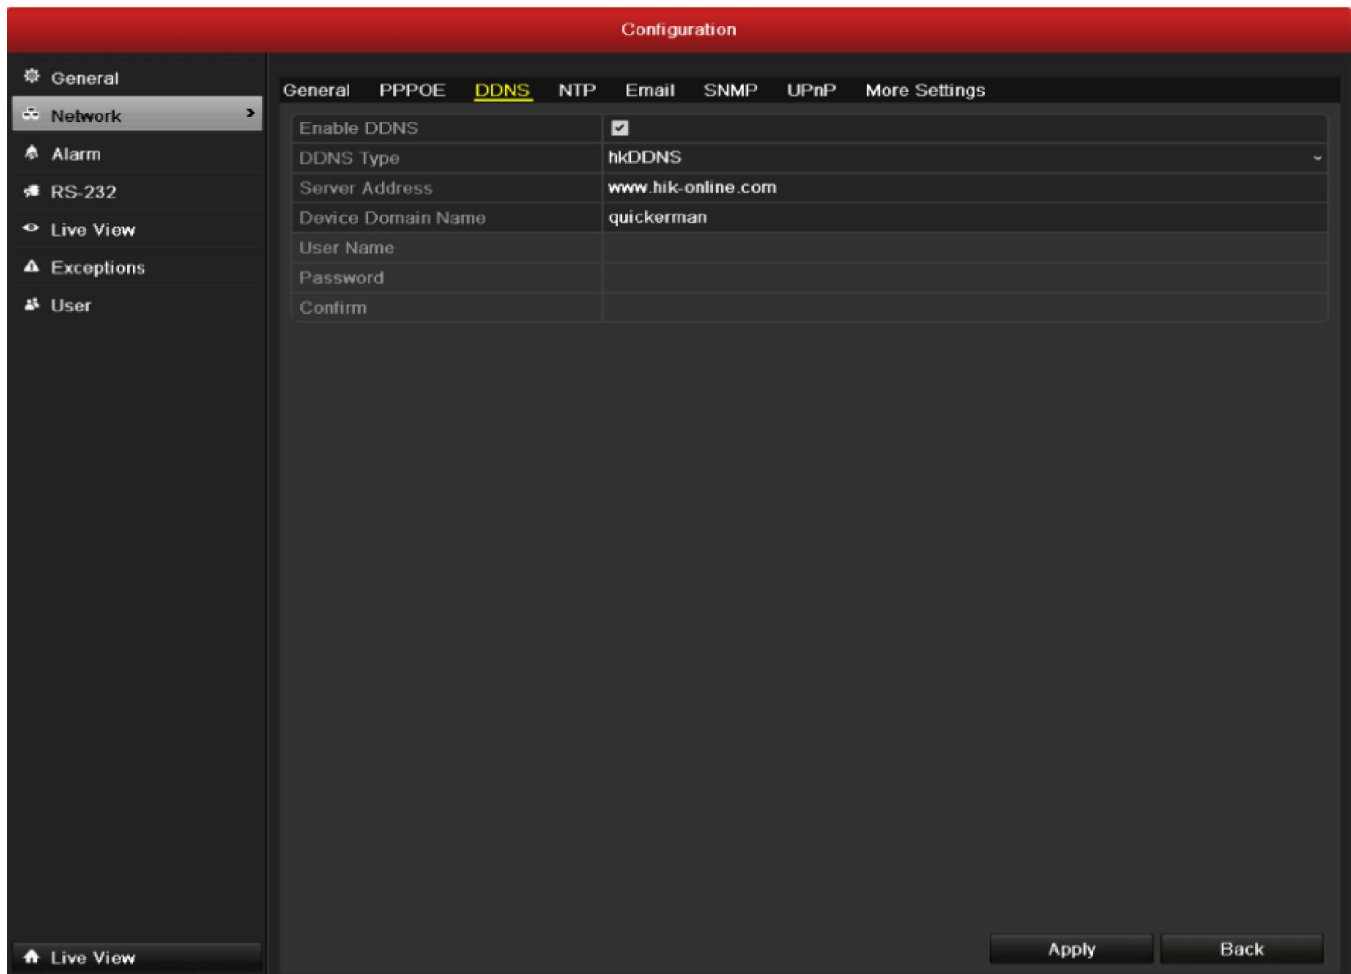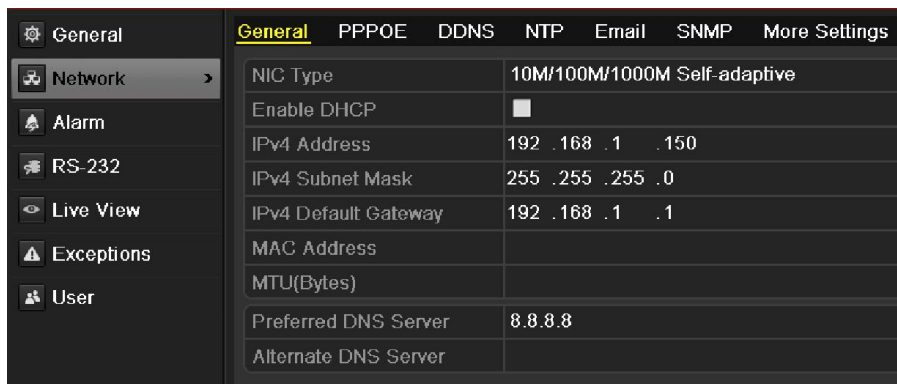

แบบที่ 2 แก้ไขผ่านบน Web Browser

IP Adress เครื่องบันทึก > Configuration > Network Settings > DDNS > Select **HiDDNS ,hkDDNS ,EasyDDNS** > แล้วใส่ชื่อ Domain name ที่ต้องการ > Save

The screenshot shows the 'Configuration' tab of a web interface. On the left is a tree view with 'Network Settings' expanded to 'TCP/IP'. The main area contains the following fields:

TCP/IP	
NIC Settings	
NIC Type	Auto
IPv4 Address	192.168.1.100 <input type="checkbox"/> DHCP
IPv4 Subnet Mask	255.255.255.0
IPv4 Default Gateway	192.168.1.1
IPv6 Address	fe80::8ee7:48ff:fe51:836e
IPv6 Default Gateway	
Mac Address	8c:e7:48:51:83:6e
MTU	1500 Byte
DNS Server	
Preferred DNS Server	8.8.8.8
Alternate DNS Server	

A 'Save' button is located at the bottom of the configuration area.

The screenshot shows the 'Configuration' tab of a web interface. On the left is a tree view with 'Network Settings' expanded to 'DDNS'. The main area contains the following fields:

DDNS	
<input checked="" type="checkbox"/> Enable DDNS	
DDNS Type	HiDDNS
Server Address	www.hik-online.com
Domain	quickerman
User Name	
Password	
Confirm	

A 'Save' button is located at the bottom of the configuration area.